



HEATING ELEMENT WITH THERMOSTAT **TER-INOX** TO WATER HEATERS



Application: water heaters, buffer tanks,
accumulation tanks, stainless steel tanks.

Temperature regulation: 5-70°C.


Independent non self-resetting safety
option TRX 87°C.

ECO – optimal set-point position 55°C

Guarantee 24 months.



HEATING ELEMENT WITH THERMOSTAT **TER-INOX** TO WATER HEATERS

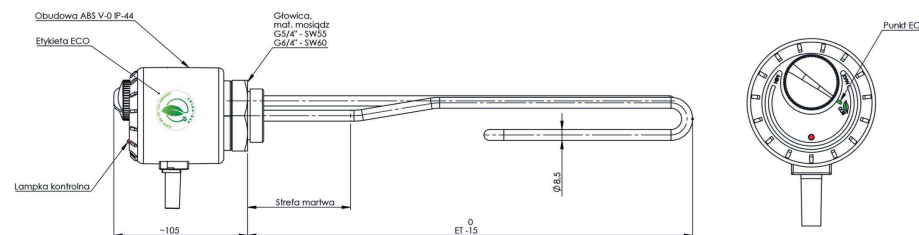

Type	Power [W]	Voltage [V]	Length of immersion [mm]	Cold zone [kg]	Threaded connection	Net weight [kg]
TER-1500-54-INOX	1500	230 ~	360	80	5/4"	0,96
TER-2000-54-INOX	2000	230 ~	360	80	5/4"	0,98
TER-3000-54-INOX	3000	230 ~	400	80	5/4"	1,00
TER-1500-64-INOX	1500	230 ~	360	80	6/4"	0,98
TER-2000-64-INOX	2000	230 ~	360	80	6/4"	1,00
TER-3000-64-INOX	3000	230 ~	400	80	6/4"	1,02

Type	Power [W]	Voltage [V]	Length of immersion [mm]	Cold zone [kg]	Threaded connection	Net weight [kg]
TERi-1500-54-INOX	1500	230 ~	360	80	5/4"	0,96
TERi-2000-54-INOX	2000	230 ~	360	80	5/4"	0,98
TERi-3000-54-INOX	3000	230 ~	400	80	5/4"	1,00
TERi-1500-64-INOX	1500	230 ~	360	80	6/4"	0,98
TERi-2000-64-INOX	2000	230 ~	360	80	6/4"	1,00
TERi-3000-64-INOX	3000	230 ~	400	80	6/4"	1,02

Heating elements are made of Incoloy material. They can work in stainless tanks.
The heater is equipped in 1500mm power cord with a plug.
Meets the latest quality standards PN-EN 60335-1: 2012, LVD 2014/35/EU.

TERMIK Sp. z o.o.
Marcinkowo 106, 11-700 Mragowo
tel. + 48 89 741 73 35, fax +48 89 741 87 25
www.termik.pl, info@termik.pl

